


Table 7: STEEL BACKING FLANGES AS/NZS 4087 - Figure B8
PN21 (Max. 80°C)

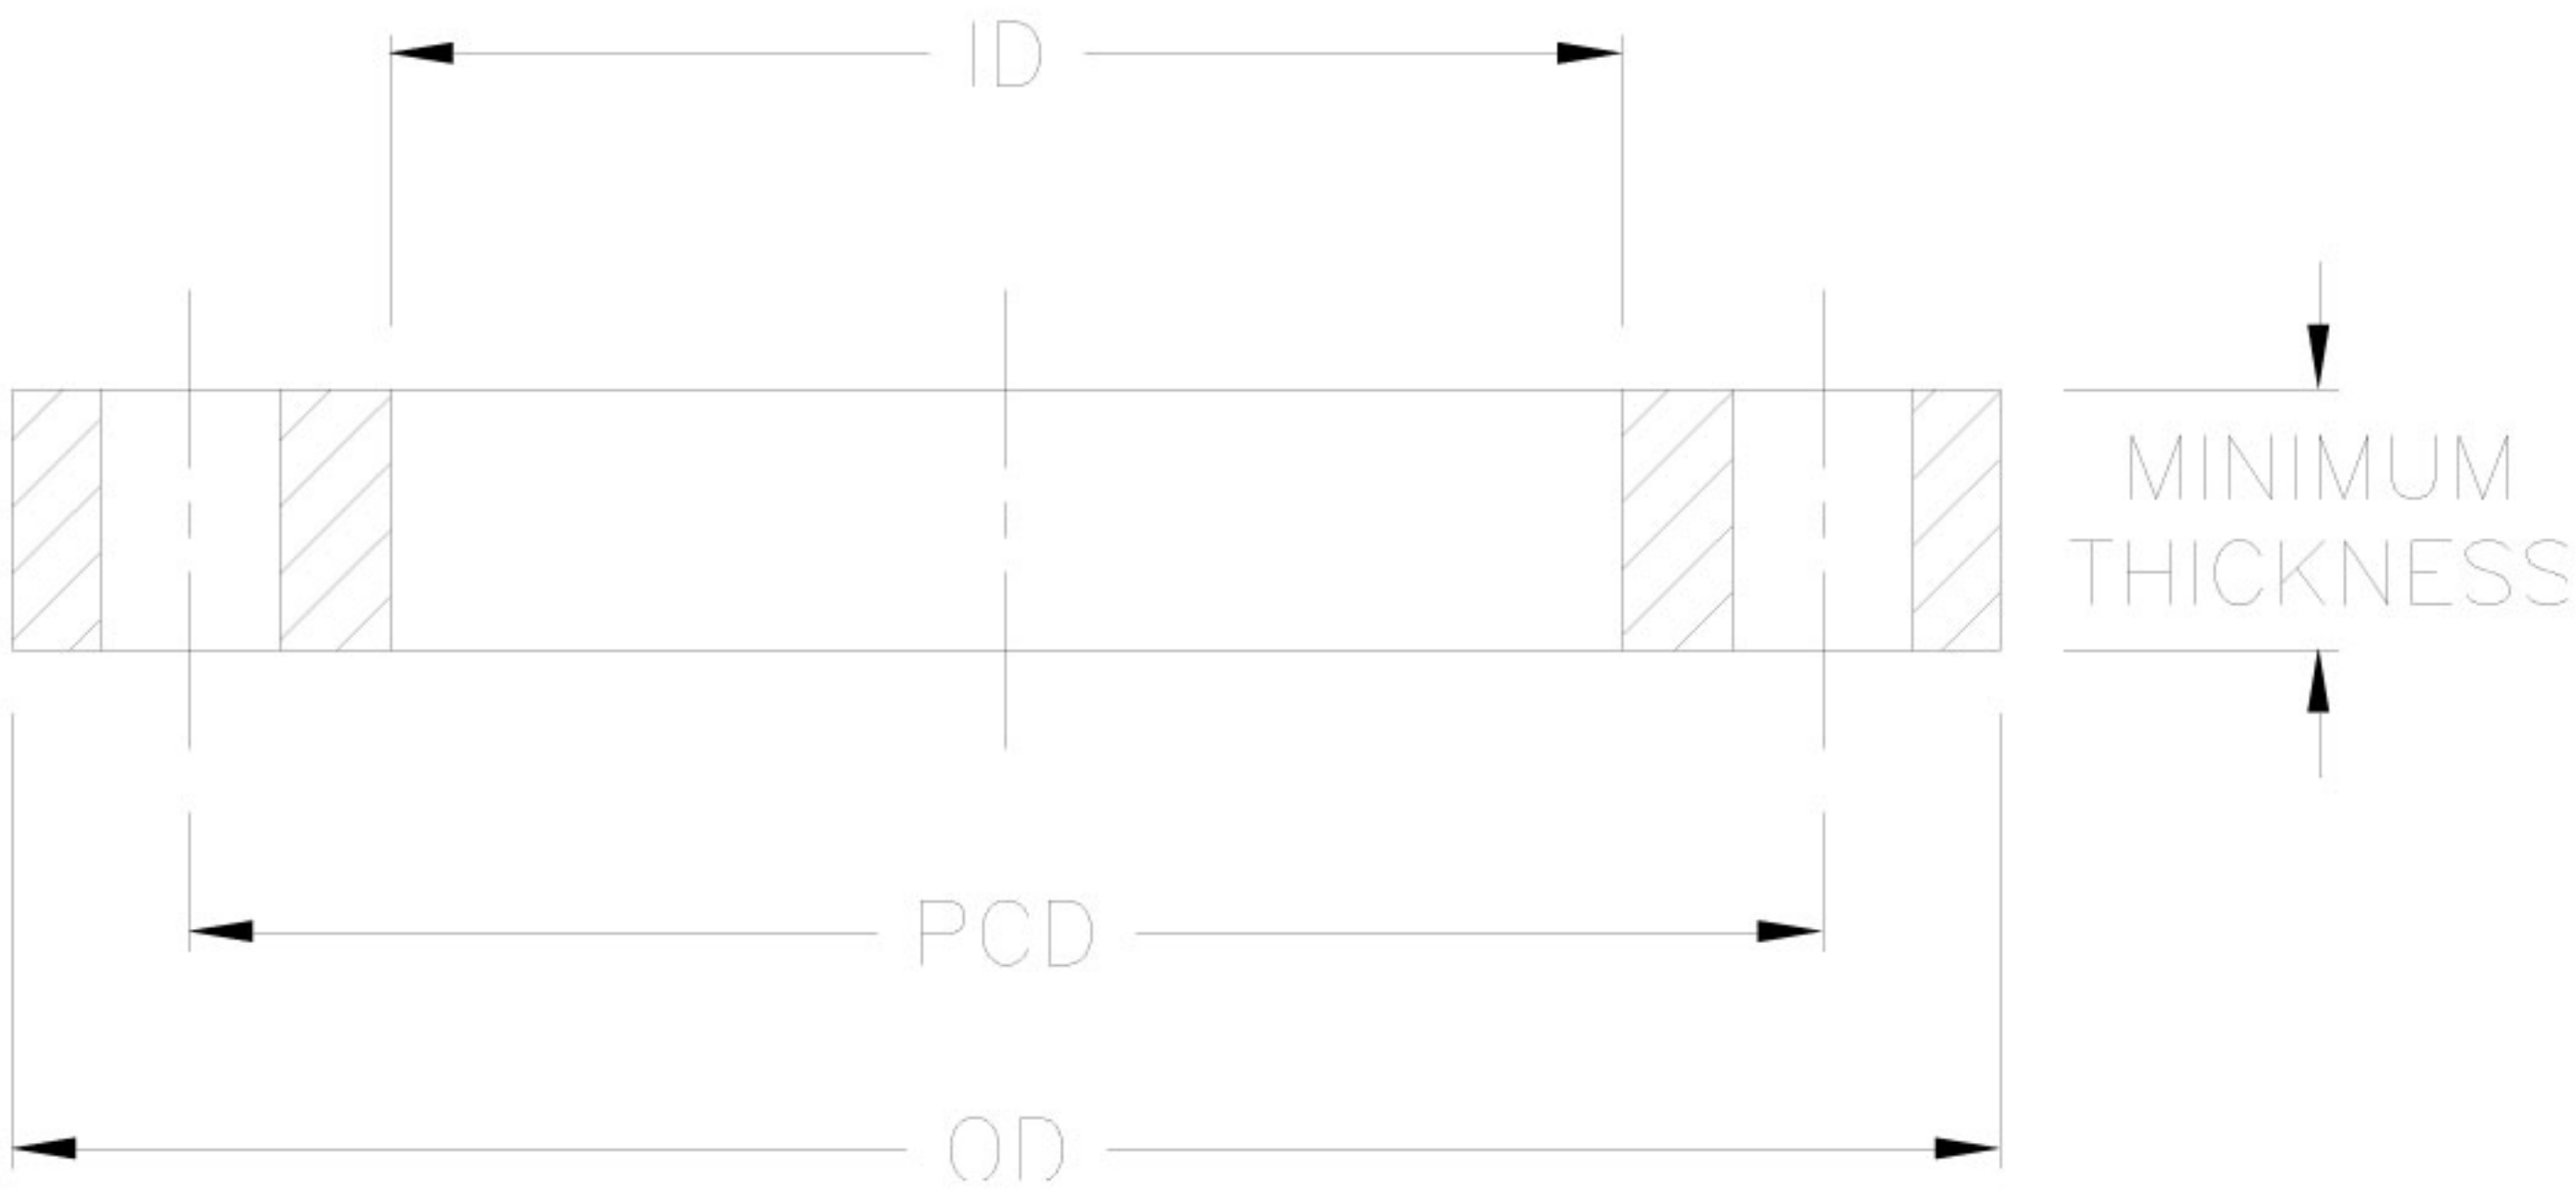

Nominal Pipe OD	Flange Size	OD	ID	Minimum Thickness	PCD	Bolt Hole No. x Dia.	Bolt Size
63	50	165	78	15	127	4X18	M16
75	65	185	92	15	146	8X18	M16
90	80	205	108	15	165	8X18	M16
110	100	230	128	19	191	8X18	M16
160	150	305	178	24	260	12X22	M20
200	200	370	235	24	324	12X22	M20
225	225	405	238	30	356	12X26	M24
250	250	430	288	30	381	12X26	M24
315	300	490	338	30	438	16X26	M24
355	350	550	376	30	495	16X30	M27
n/a	375	580	n/a	38	521	16X30	M27
400	400	610	430	38	552	20X30	M27
450	450	675	470	38	610	20X33	M30
500	500	735	533	48	673	24X33	M30
630	600	850	645	58	781	24X36	M33
710	700	935	740	58	857	24X36	M33
n/a	750	1015	n/a	58	940	28X36	M33
800	800	1060	843	68	984	28X36	M33
900	900	1185	947	68	1105	32X39	M36
1000	1000	1275	1050	78	1194	36X39	M36
1200	1200	1530	-	88	1441	40X42	M39

NOTE: This table has bolting compatibility with AS 2129 Table F & H flanges.